

$$1) \quad \underline{n}_1 = \lambda_1 \underline{n}_1 \quad - \textcircled{1}$$

$$\underline{n}_2 = \lambda_2 \underline{n}_2 \quad - \textcircled{2}$$

Take dot products of $\textcircled{1}$ with \underline{n}_2
 $\textcircled{2}$ with \underline{n}_1

$$\underline{n}_1 \cdot \underline{n}_2 = \lambda_1 \underline{n}_1 \cdot \underline{n}_2 - \textcircled{3}$$

$$\underline{n}_2 \cdot \underline{n}_1 = \lambda_2 \underline{n}_2 \cdot \underline{n}_1 - \textcircled{4}$$

Subtract $\textcircled{4}$ from $\textcircled{3}$

$$(\lambda_1 - \lambda_2) \underline{n}_1 \cdot \underline{n}_2 = 0$$

\Rightarrow Either $\lambda_1 = \lambda_2$, or $\underline{n}_1 \cdot \underline{n}_2 = 0$

Since all eigenvalues are distinct, $\lambda_1 \neq \lambda_2$

Thus, the eigenvectors must be perpendicular to each other

$$2) \quad \underline{n}_1 = \lambda \underline{n}_1 \quad - \textcircled{1} \quad \times \alpha$$

$$\underline{n}_2 = \lambda \underline{n}_2 \quad - \textcircled{2} \quad \times \beta$$

Add $\textcircled{1}$ and $\textcircled{2}$

$$\underline{n} (\alpha \underline{n}_1 + \beta \underline{n}_2) = \lambda \underbrace{(\alpha \underline{n}_1 + \beta \underline{n}_2)}$$

this is also
an eigenvector

$$\underline{n}_3 = \lambda' \underline{n}_3 \quad - \textcircled{3}$$

From Problem 1, we know $\underline{n}_3 \perp \underline{n}_1, \underline{n}_2$

$\alpha \underline{n}_1 + \beta \underline{n}_2$ spans a plane \perp to \underline{n}_3

$$3) \quad [\underline{\underline{A}}] = \begin{bmatrix} 0 & 1 & 1 \\ 1 & 0 & 1 \\ 1 & 1 & 0 \end{bmatrix}$$

$$[\underline{\underline{A}} - \lambda \underline{\underline{I}}][\underline{n}] = \underline{0}$$

$$\det([\underline{\underline{A}} - \lambda \underline{\underline{I}}]) = 0$$

$$\Rightarrow \begin{vmatrix} -\lambda & 1 & 1 \\ 1 & -\lambda & 1 \\ 1 & 1 & -\lambda \end{vmatrix} = 0$$

$$\Rightarrow -\lambda(\lambda^2 - 1) - 1(-\lambda - 1) + 1(1 + \lambda) = 0$$

$$\Rightarrow -\lambda^3 + \lambda + \lambda + 1 + 1 + \lambda = 0$$

$$\Rightarrow -\lambda^3 + 3\lambda + 2 = 0$$

$$\Rightarrow -\lambda^3 - 1 + 3\lambda + 3 = 0$$

$$\Rightarrow -(\lambda^3 + 1) + 3(\lambda + 1) = 0$$

$$\Rightarrow -(\lambda + 1)(\lambda^2 - \lambda + 1) + 3(\lambda + 1) = 0$$

$$\Rightarrow (\lambda + 1) [-\lambda^2 + \lambda - 1 + 3] = 0$$

$$\Rightarrow (\lambda + 1) [-\lambda^2 + \lambda + 2] = 0$$

$$\Rightarrow (\lambda + 1) [-\lambda^2 + 2\lambda - \lambda + 2] = 0$$

$$\Rightarrow -(\lambda + 1)(\lambda + 1)(\lambda - 2) = 0$$



$$\Rightarrow \lambda_1 = \lambda_2 = -1, \quad \lambda_3 = 2$$

Two repeated eigenvalues, only \underline{n}_3 will be unique

$$\left. \begin{array}{l} -2n_{11} + n_{12} + n_{13} = 0 \\ n_{11} - 2n_{12} + n_{13} = 0 \\ n_{11} + n_{12} - 2n_{13} = 0 \\ n_{11}^2 + n_{12}^2 + n_{13}^2 = 1 \end{array} \right\} \rightarrow \begin{pmatrix} n_{11} \\ n_{12} \\ n_{13} \end{pmatrix} = \begin{pmatrix} \frac{1}{\sqrt{3}} \\ \frac{1}{\sqrt{3}} \\ \frac{1}{\sqrt{3}} \end{pmatrix}$$

$$\Rightarrow \begin{bmatrix} \underline{\underline{\sigma}} \\ \underline{n} \end{bmatrix}_{(x,y,z)} = \begin{bmatrix} 0 & 0 & -G\Theta y \\ 0 & 0 & G\Theta x \\ -G\Theta y & G\Theta x & 0 \end{bmatrix}$$

Check yourself that the above stress tensor satisfies the equations of equilibrium. The lateral surface has outward normal \underline{n}

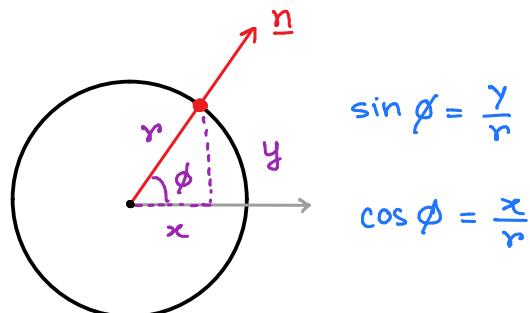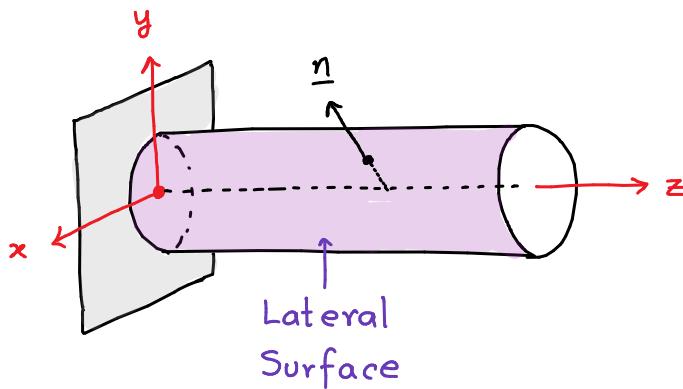

$$[\underline{n}]_{(x,y,z)} = \begin{bmatrix} \cos \phi \\ \sin \phi \\ 0 \end{bmatrix} = \begin{bmatrix} x/r \\ y/r \\ 0 \end{bmatrix}$$

$$[\underline{\underline{T}}^n] = [\underline{\underline{\sigma}}][\underline{n}]$$

$$= \begin{bmatrix} 0 & 0 & G\Theta y \\ 0 & 0 & -G\Theta x \\ G\Theta y & -G\Theta x & 0 \end{bmatrix} \begin{bmatrix} x/r \\ y/r \\ 0 \end{bmatrix} = \begin{bmatrix} 0 \\ 0 \\ 0 \end{bmatrix}$$

\Rightarrow There is no external surface force on the lateral surface

For principal stresses, one needs to solve an eigenvalue problem

$$\det([\underline{\underline{\sigma}} - \lambda \underline{\underline{I}}]) = 0$$

$$\Rightarrow \det \left(\begin{bmatrix} -\lambda & 0 & G\Theta y \\ 0 & -\lambda & -G\Theta x \\ G\Theta y & -G\Theta x & -\lambda \end{bmatrix} \right) = 0$$

$$\Rightarrow -\lambda^3 + \lambda G^2 \Theta^2 (x^2 + y^2) = 0$$

$$\Rightarrow -\lambda (\lambda^2 - G^2 \Theta^2 (x^2 + y^2)) = 0$$

$$\Rightarrow \lambda_1 = G\Theta (x^2 + y^2)^{1/2}, \quad \lambda_2 = 0, \quad \lambda_3 = -G\Theta (x^2 + y^2)^{1/2}$$

The first principal direction can be found as:

$$\begin{bmatrix} -\lambda_1 & 0 & G \otimes y \\ 0 & -\lambda_1 & G \otimes x \\ G \otimes y & -G \otimes x & -\lambda_1 \end{bmatrix} \begin{bmatrix} n_{11} \\ n_{12} \\ n_{13} \end{bmatrix} = \begin{bmatrix} 0 \\ 0 \\ 0 \end{bmatrix}$$

Below we write the three equations (of which only two are independent) plus one equation for normalization of the vector

$$-\lambda_1 n_{11} + G \otimes y n_{13} = 0$$

$$-\lambda_1 n_{12} - G \otimes x n_{13} = 0$$

$$G \otimes y n_{11} - G \otimes x n_{12} - \lambda_1 n_{13} = 0$$

$$n_{11}^2 + n_{12}^2 + n_{13}^2 = 1$$


$$n_{11} = \mp \frac{G \otimes y}{\sqrt{x^2 + y^2}}$$

$$n_{12} = \mp \frac{G \otimes x}{\sqrt{x^2 + y^2}}$$

$$n_{13} = \pm \frac{1}{\sqrt{2}}$$

You can derive the two other principal directions similarly.

5) Consider a circular strip from the middle of the cylinder

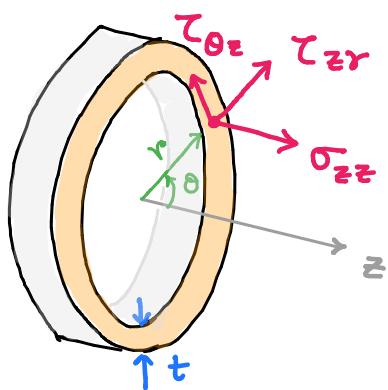

In general, stresses are functions of the coordinates, so

$$\left. \begin{array}{l} \sigma_{zz} \\ \tau_{\theta z} \\ \tau_{zr} \end{array} \right\} \text{functions of } r, \theta, z$$



Due to axisymmetry of the geometry and that of the applied forces about the center of the cylinder, it can be fairly assumed that σ_{zz} , τ_{zr} and $\tau_{\theta z}$ are not going vary with θ

$$\left. \begin{array}{l} \sigma_{zz} \\ \tau_{zr} \\ \tau_{\theta z} \end{array} \right\} \text{functions of } r \text{ and } z \text{ only}$$

Due to coaxiality of the force applied in the z -direction and no moment, σ_{zz} , τ_{zr} , $\tau_{\theta z}$ must not change with z .

$$\left. \begin{array}{l} \sigma_{zz} \\ \tau_{zr} \\ \tau_{\theta z} \end{array} \right\} \text{functions of } r \text{ only}$$

In this case, the thickness is very small so variations across r is negligible, so we will consider constant values of σ_{zz} , τ_{zr} , and $\tau_{\theta z}$

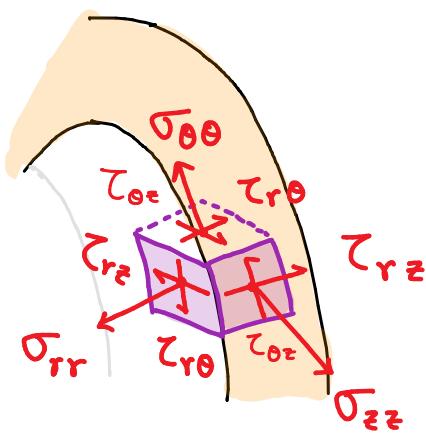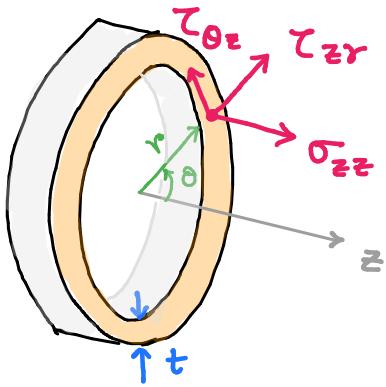

$$\left. \begin{array}{l} \sigma_{zz} \\ \tau_{\theta z} \\ \tau_{rz} \end{array} \right\} \text{constant}$$

Since there is no external shear traction on the inner or outer boundary, $\tau_{rz} = \tau_{r\theta} = 0$


For $\tau_{\theta z}$, the resultant force generated at any C/S must be

$$\text{Moment abt } z = \tau_{\theta z} (2\pi r t)$$

$$\Rightarrow 0 = \tau_{\theta z} (2\pi r t)$$

$$\Rightarrow \boxed{\tau_{\theta z} = 0}$$

Using force balance in z-dir



$$F = \sigma_{zz} (2\pi r t)$$

$$\Rightarrow \boxed{\sigma_{zz} = \frac{F}{2\pi r t}}$$


On the -ve r face, we have σ_{rr} , $\tau_{rz} = 0$, $\tau_{\theta r} = 0$ (to maintain symm.)

On the internal surface, we have $\sigma_{rr} = -P$ whereas on the +ve r face, we have no external force, so $\sigma_{rr} = 0$, i.e.

$$\sigma_{rr}|_r \text{ (internal face)} = -P, \quad \sigma_{rr}|_{r+t} \text{ (external face)} = 0$$

On the +ve θ face, $\tau_{\theta r} = 0$, $\tau_{\theta z} = 0$, $\sigma_{\theta\theta} (?)$

We cut the C/S

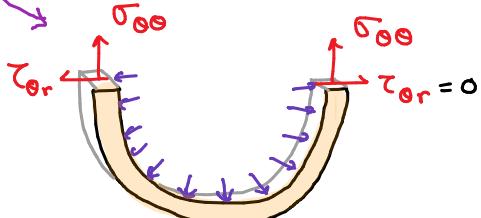

$$2\sigma_{\theta\theta}(t) = P(2r)$$

$$\Rightarrow \boxed{\sigma_{\theta\theta} = \frac{Pr}{t}}$$